

1/6

FIG. 1

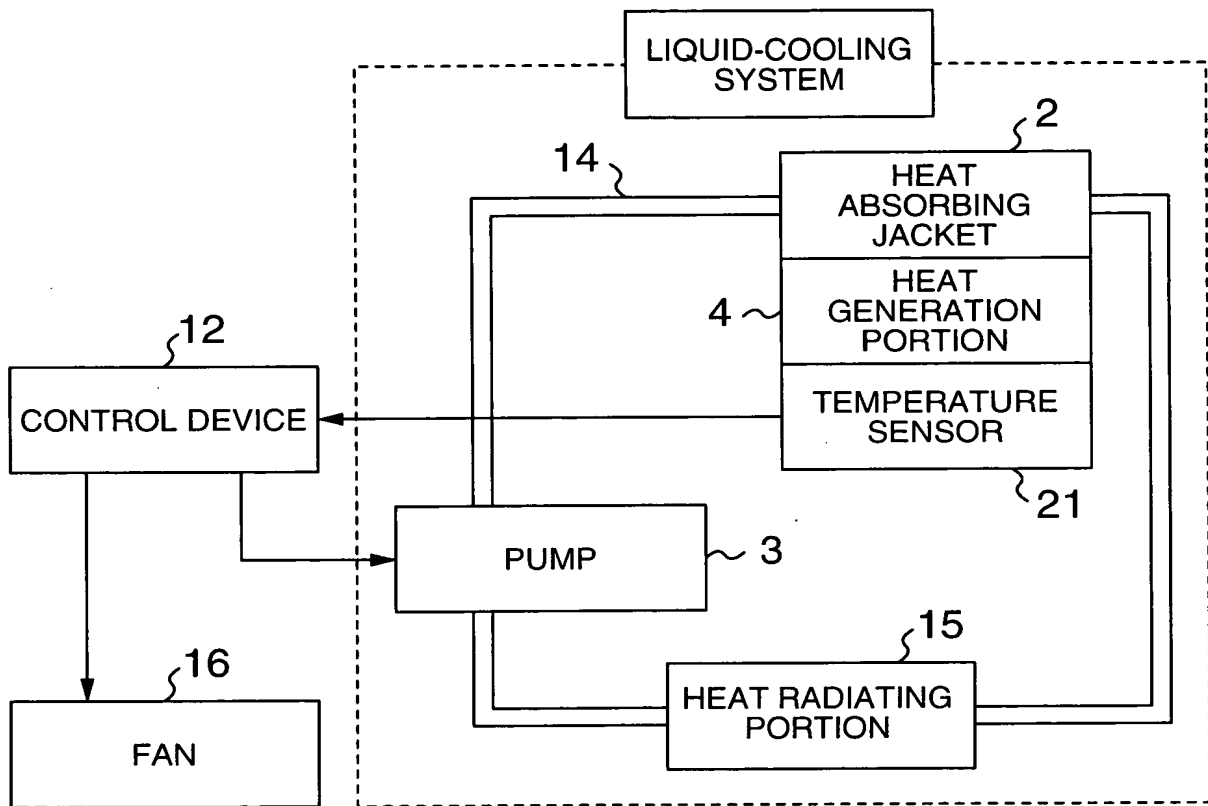


FIG. 2

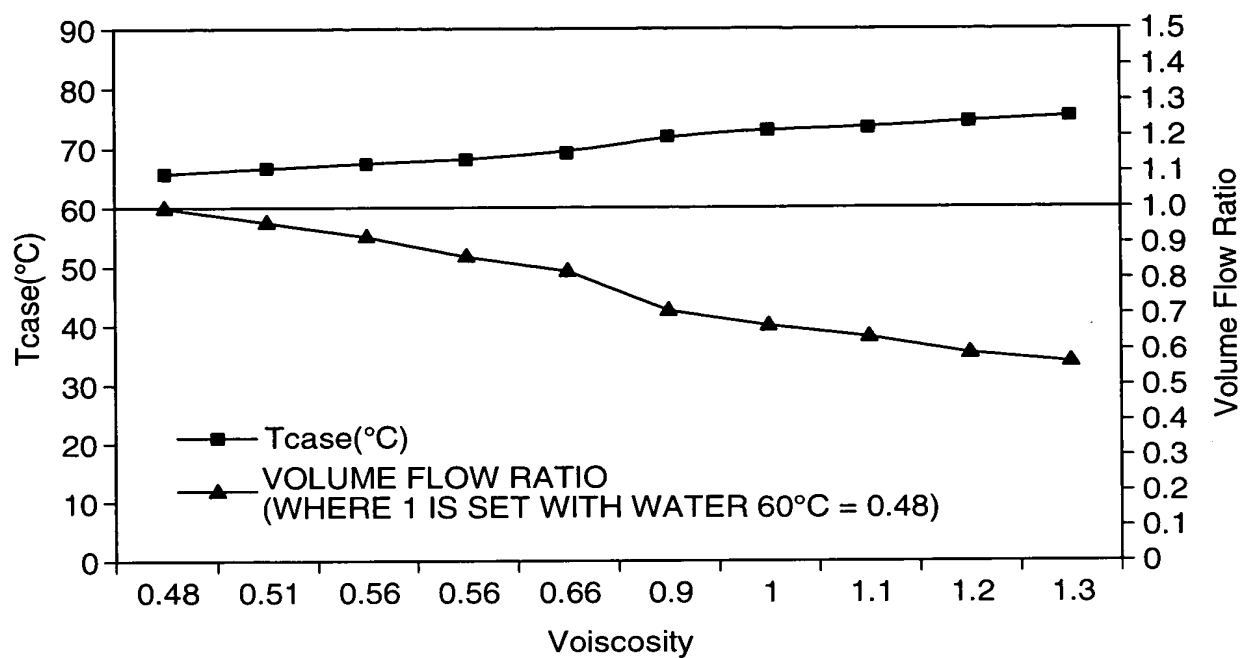


FIG. 3

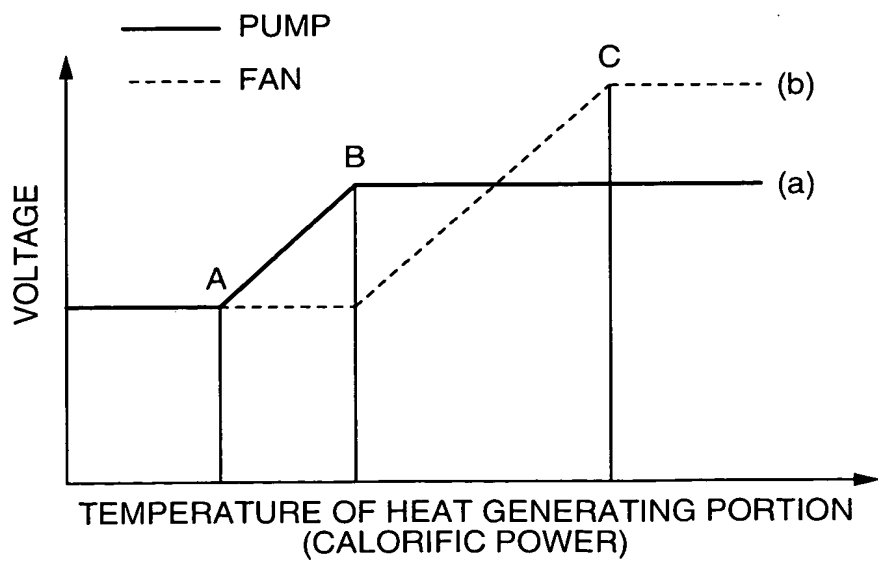


FIG. 4

| | Case | T _{case} | FAN VOLTAGE | PUMP VOLTAGE | NOISE LEVEL |
|-------|------|-------------------|----------------|-----------------|-------------|
| (a) ~ | 1 | 55 | 8V | 8V | 24.2dB |
| (b) ~ | 2 | 55 | 7V | 9V | 22.5dB |

FIG. 5

| CALORIFIC POWER (W) | LIQUID TEMPERATURE T _q (°C) | HEAT RESISTANCE ΔT (°C) | TEMPERATURE OF HEAT GENERATING PORTION T _{case} (°C) |
|---------------------------|--|---------------------------------------|---|
| 40 | 51 | 4 | 55 |
| 45 | 52 | 3 | 55 |
| 50 | 53 | 3 | 56 |
| 55 | 54 | 3.5 | 57.5 |

FIG. 6

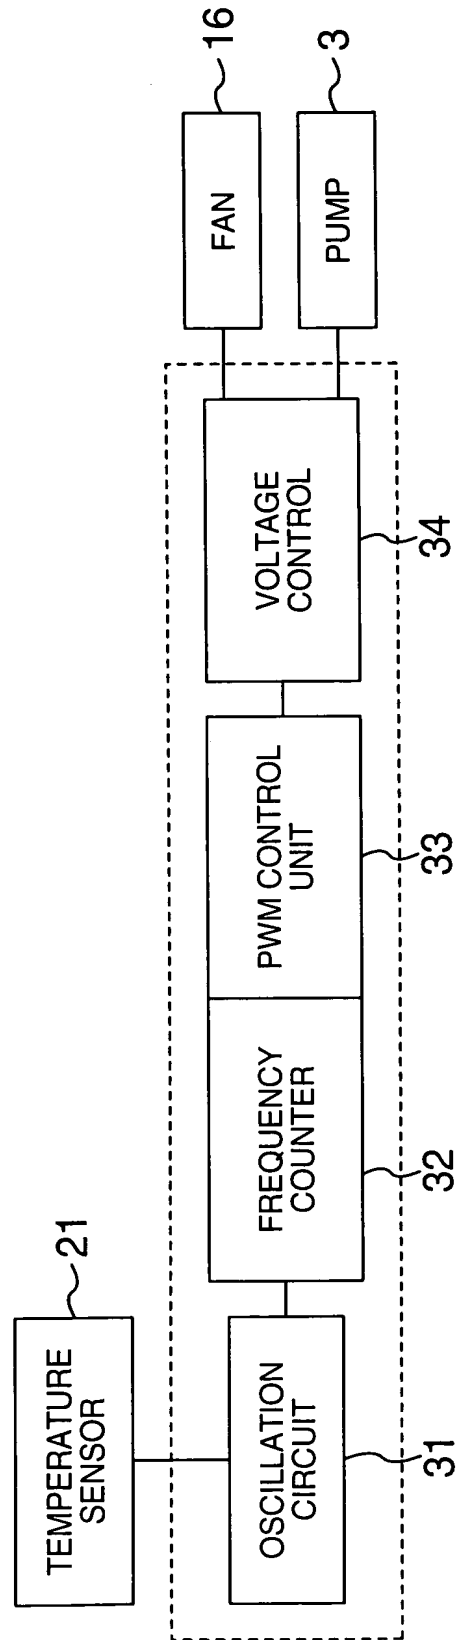


FIG. 7

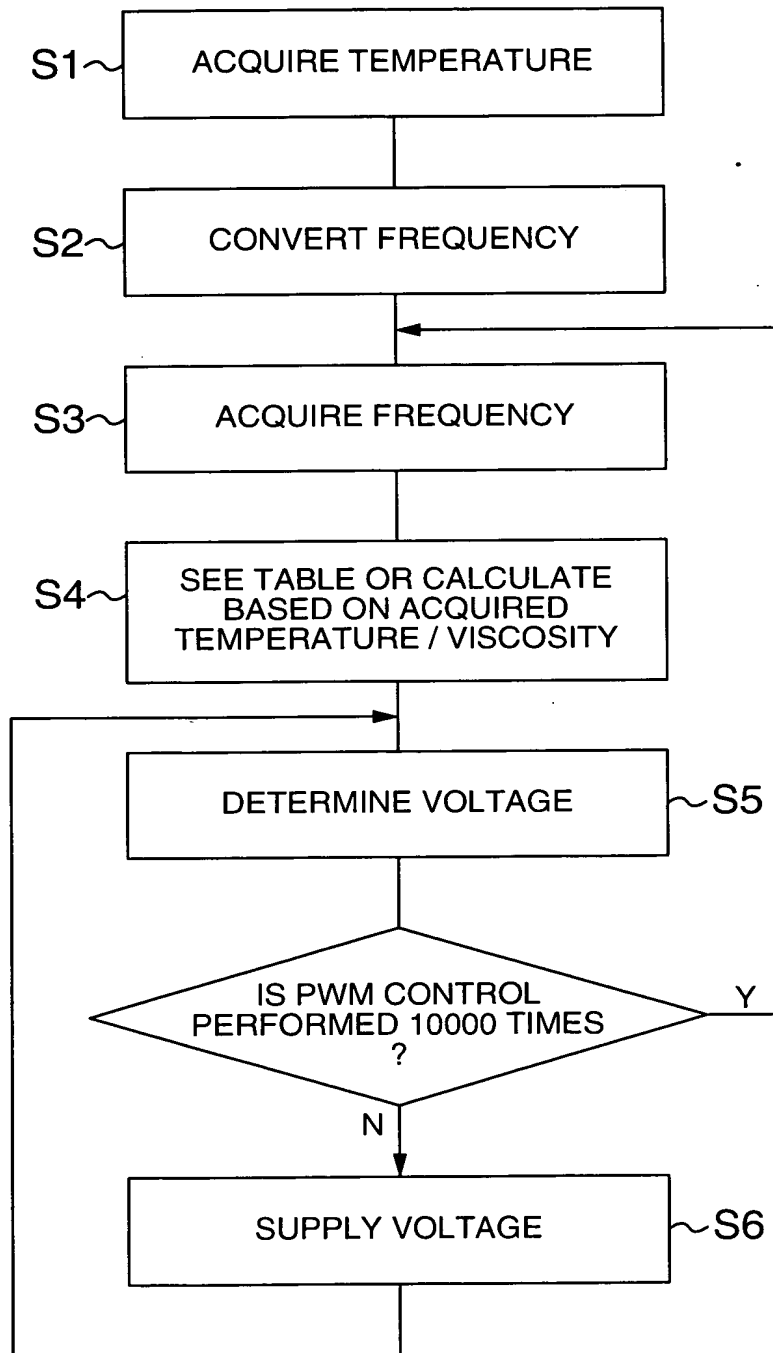


FIG. 8

